



# ImageJetVue®


- Perforation pattern:** ● Approx. 65/35 (35% open)
- Perforation size:** ● 0.06 in. (1.5 mm)
- Film:** ● 8-mil calendered PVC with an inkjet-receptive top coating on a 2-in. core
- Standard roll sizes:** ● 36 & 54 in. x 50 ft.
- Application:** ● Decals, POP/retail posters, other small-format & graphics-intensive window signage

# JetVue®

- Perforation pattern:** ● Approx. 50/50 (50% open)
- Perforation size:** ● 0.08 in. (2.0 mm)
- Film:** ● 8-mil calendered PVC with an inkjet-receptive top coating on a 2-in. core
- Standard roll sizes:** ● 36 & 54 in. x 50 ft.
- Application:** ● POP posters, retail & commercial window signage

**Product code:** CFIJVWL

**Product code:** CFJVWL

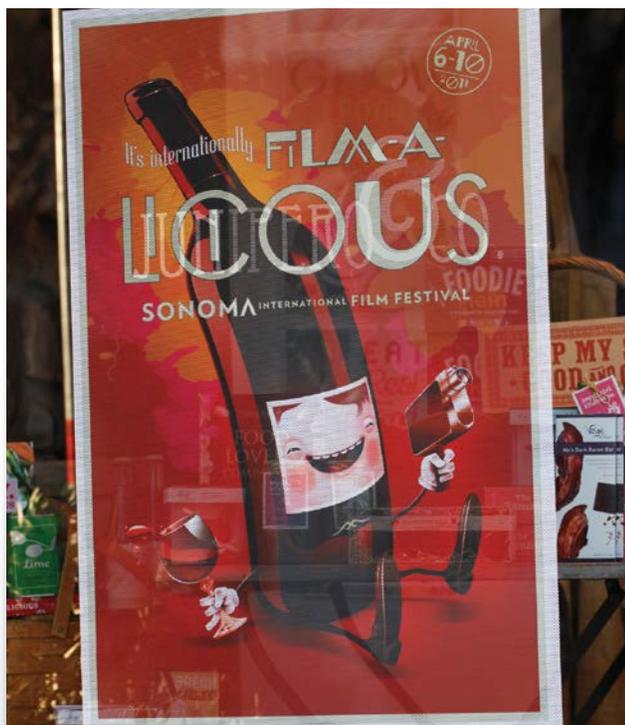

**CLEAR FOCUS Imaging, Inc.**



**CLEAR FOCUS ImageJetVue® FILM**

**Product code: CFIJVWL**

**CLEAR FOCUS JetVue® FILM**

**Product code: CFJVWL**

### Exterior Adhesive Mount, Aqueous InkJet-Compatible Product Specifications

8-mil white/black composite PVC with removable clear acrylic pressure-sensitive adhesive and a patented release liner consisting of white PET film laminated to perforated paper to absorb ink and to facilitate sensing of media by printer.

Applications	Windows, glass doors or other transparent surfaces.
Composition	White/black PVC laminate with clear pressure-sensitive adhesive coating and a patented release liner consisting of white PET film laminated to perforated paper. Features an ultra-thin, aqueous inkjet-receptive top coat.
Open Area	ImageJetVue: 35% (approx.); JetVue: 50% (approx.)
Vinyl Thickness (incl. adhesive)	8 mils (.008 in./203 microns), approx.
Release Liner Thickness	7 mils (.007 in./178 microns), approx.
Adhesive Thickness	1 mil (.001 in./25 microns), approx.
Perforation Diameter	ImageJetVue: .060 in. (1.5 mm); JetVue: 0.80 in. (2.0 mm)
Standard Widths/Lengths	36 & 54 in. x 50 ft. (91.44 & 137 cm x 15.24 m) Custom sizes available by special order.
Dimensional Stability	Good
Minimum Application Temperature	40° F (4° C)
Service Temperature Range	0° F to 140° F (-17° C to 60° C)
Expected Lifetime Exterior	12-18 months. 6 months for clean removal. Adhesion may increase with time.
Expected Image Lifetime	Varies according to ink type, use of clear coat or overlamine, and conditions under which image is displayed. Lamination is recommended for outdoor use. Conduct test prior to production.
Water Resistance	Immersion in water not recommended. If exposed to rain, the use of an optically clear, compatible overlamine is recommended to protect the graphics and to prevent holes from filling with water.
Humidity Resistance	Fair
Storage Stability	1-year shelf life when stored at 70° F (21° C) and 50% relative humidity.
Colors Available	White on print side and black on adhesive side.
Printing	Designed for pigmented or dye-based aqueous inkjet inks. Print image on vinyl side of product, not on the release liner.
Application	Apply to dry, clean glass surface. Use mild soap and water, rinse and dry the glass well. Do NOT use ammonia, Windex® or other solvent-based glass cleaners prior to application. Note: JetVue is not recommended for use on vehicles because of the comparatively short life span of aqueous inkjet inks. ImageJetVue is not for use on vehicle windows because of reduced visibility.
Removal	Remove by peeling from surface. Remove adhesive residue on older installations, if necessary.

### Other JetVue/ImageJetVue Products

**With a Solid Paper Liner**  
Codes: CFJVSL/CFIJVSL

Features an unperforated solid paper liner for use with certain printers that have a media-detection sensor (e.g., HP Z6100/Z6200). Custom order.

Subject to change without notice

It is the responsibility of purchasers to independently verify, prior to use, the suitability of the products for their specific applications and print methods. CLEAR FOCUS cannot be held liable for any misuse, damage or losses as specified in its product warranty.

CLEAR FOCUS Imaging, Inc. 60 Maxwell Court, Santa Rosa, CA 95401 USA

Tel. (707) 544-7990 • Fax: (707) 544-1886 • E-mail: headoffice@clearfocus.com • Web: www.clearfocus.com

USA toll-free (800) 307-7990